

CYCLONE-L

Cyclone-L is a type of outdoor shortened full-height turnstile with metal barrier rods.

Barrier rods design may be straight as well as U-shaped. The range of modifications includes three or four rods types and also different type of metal finishing.



MOST FAVORABLE SOLUTION FOR RECREATION

AREAS AND AMUSEMENT PARKS

533
mm
PASSAGE
WIDTH

20
pers/min
SINGLE ACCESS
FLOW RATE

60
pers/min
FREE ACCESS
FLOW RATE

IP 41-65*
PROTECTIVE LEVEL

MOTORIZED

BI-DIRECTIONAL

**ACCESS CONTROL
SYSTEM**

**MANUAL
CONTROL**

Key features:

- Can operate outdoor and indoor that allows to use it without any restrictions in any season and weather conditions
- Wide range of available material and coating, modification, type of rotor assembly
- Whisper quiet, low noise operation
- Successful combination of affordable price and high quality
- Possibility of a barrier gate customization
- Can be integrated with any type of access control systems
- Low power consumption
- Wired remote control panel is in standard kit
- In case of power failure, free rotation (fail-safe)
- Steadfast housing suitable for high traffic areas
- Wide choice of accessories

*option



www.tiso.global
+380 (44) 291-21-11
sales@tiso.global



Technical Specifications:




Model	X-type - 90°	Y-type - 120°
Width, mm	1430	
Length, mm	1350	1168
Height, mm	1314	
Passage width, mm	533	
Mechanism	Servo-driven (Triservo-M)	
Blocking system	Two electromagnetic stoppers	
Emergency mode	Free pass in both directions	
Power fail	Fail-safe (rotor is unlocked- standard)	
MCBF, cycles	5 000 000	
MTTR, min	< 25	

Electrical Specifications:

Maximum power consumption, W	55
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V

Finishing

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

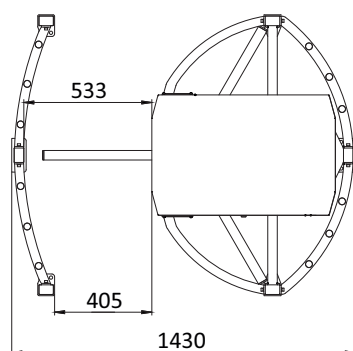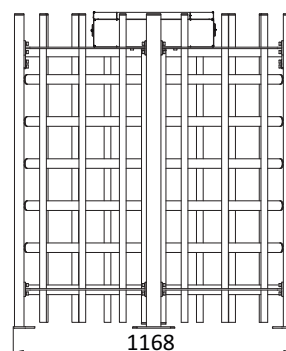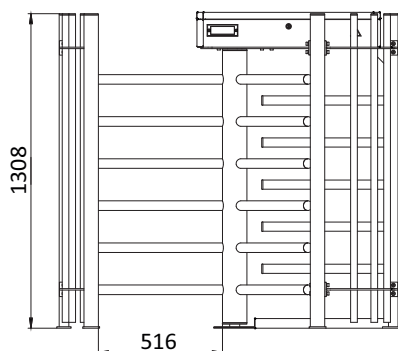

Specifications are subject to change without prior notice.